


### Spirovent Quad® Air Eliminator, Dirt Separator, Hydraulic Separator, Low Loss Header

Job Name:
Engineer:
Contractor:
Representative:

Tag	Model	Flow	Size	Location

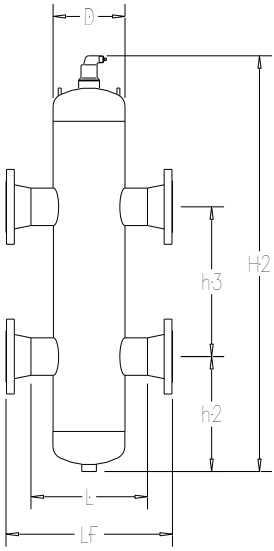

**Specifications:**

Body	Steel
Vent Head	Brass
Float	Non-Ferrous
Seal	Viton
O Ring	Viton
Coalescing Medium	Copper
Max. Working Pressure	150 psig
Max. Operating Temperature	270°F

**Notes:**

Model	Unit	VDX200	VDX250	VDX300	VDX400	VDX500	VDX600	VDX800	VDX1000	VDX1200
Pipe Size	inch	2	2 1/2	3	4	5	6	8	10	12
D	inch	6.6	6.6	8.6	8.6	12.8	12.8	16.0	20.0	24.0
H2	inch	32.0	36.0	39.0	50.0	61.0	70.0	91.0	113.0	133.0
h2	inch	9.4	9.9	10.6	13.8	17.4	19.9	26.6	32.9	39.2
h3	inch	9.5	12.0	14.0	18.0	22.0	26.0	34.0	42.0	50.0
L (Threaded)	inch	12.0	12.0	15.0	15.0	---	---	---	---	---
LF (Flanged)	inch	15.0	15.0	20.0	20.0	26.0	26.0	32.0	36.0	42.0
Blow Down	inch	1	1	1	1	1	1	1	1	1
Weight (lbs)	MT	56	64	106	137	---	---	---	---	---
	FA	80	96	146	197	273	323	622	978	1747
Rec. Flow	GPM	60	90	140	240	370	540	940	1470	2090

\*Flanged "FA" Models Fabricated and Stamped in accordance with ASME, Section VIII, Division 1