


Spirovent Quad® Hydraulic Separator (Low Loss Header), Air Eliminator, Dirt Separator with Magnet

Job Name:
Engineer:
Contractor:
Representative:

Tag	Model	Flow	Size	Location

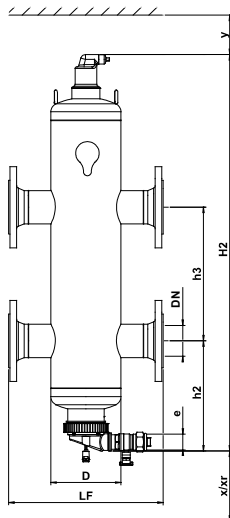

Specifications:

Body	Steel
Vent Head	Brass
Float	Non-Ferrous
Seal	Viton
O Ring	Viton
Coalescing Medium	Copper
Magnets	Neodymium
Max. Working Pressure	150 psig
Max. Operating Temperature	270°F

Notes:

DN - Pipe Size	2"	2 ½"	3"	4"	5"	6"	
D (inches)	6.6	6.6	8.6	8.6	12.8	12.8	
H2 (inches)	32.0	36.0	39.0	50.0	61.0	70.0	
h2 (inches)	9.4	9.9	10.6	13.8	17.4	19.9	
h3 (inches)	9.5	12.0	14.0	18.0	22.0	26.0	
LF (inches)	15.0	15.0	20.0	20.0	26.0	26.0	
e (inches)	1	1	1	1	1	1	
x (inches)	3	3	3	3	3	3	
y (inches)	3	3	3	3	3	3	
Dry Weight (lbs)	90	106	156	207	283	333	
Volume (gallons)	3.2	3.7	7.1	9.4	27	32	
Rec. Flow (gpm)	60	90	140	240	370	540	
Model	VDX---FAM	200	250	300	400	500	600

(Dimensions for reference only)

Flanged. ASME Section VIII, Division 1 Stamped and Registered