

SPIROVENT COMBI SPIROVENT QUAD MAGNET

Spirovent Air and Dirt Separators
now also with Powerful Magnets



Industry-leading
3-year guarantee

SPIROVENT COMBI

Protects
pumps, valves, boilers
and heat exchangers
from air, dirt and debris

SPIROVENT QUAD

Connections and coalescing
medium are engineered to allow
for the ultimate in hydraulic
balance



Eliminates 100% of the free air,
100% of the entrained air, and
up to 99.6% of the dissolved air
in the system



Separates dirt particles down to
5 micron and ferrous material
using powerful magnets
within the flowpath

For information and availability:
www.spirotherm.com

maximizing performance

SPIROVENT COMBI SPIROVENT QUAD MAGNET




SPECIFICATIONS

- Steel body
- Brass vent head
- Non-ferrous float
- Viton seal
- Viton O-ring
- Engineered Spirotube® coalescing media
- Neodymium magnets
- 150 psig maximum working pressure
- 270°F maximum operating temperature
- Blowdown valve included, adjustable 360°




Spirovent® Combi | Air Eliminator/Dirt Separator with Magnet

Part Number	VDT200FAM	VDT250FAM	VDT300FAM	VDT400FAM	VDT500FAM	VDT600FAM	VDT800FAM	VDT1000FAM	VDT1200FAM
Pipe Size	Inch 2	Inch 2.5	Inch 3	Inch 4	Inch 5	Inch 6	Inch 8	Inch 10	Inch 12
D	Inch 6.3	Inch 6.3	Inch 8.6	Inch 8.6	Inch 12.8	Inch 12.8	Inch 16.0	Inch 20.0	Inch 24.0
H2	Inch 29.3	Inch 29.3	Inch 35.4	Inch 35.4	Inch 45.7	Inch 45.7	Inch 55.8	Inch 71.5	Inch 84.7
h2	Inch 12.4	Inch 12.4	Inch 15.6	Inch 15.6	Inch 20.9	Inch 20.9	Inch 26.2	Inch 34.1	Inch 40.2
LF	Inch 15.2	Inch 15.7	Inch 20.2	Inch 20.6	Inch 27.7	Inch 27.7	Inch 33.6	Inch 37.5	Inch 42.5
e	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1
x	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3
y	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3
Weight	Lbs. 76	Lbs. 85	Lbs. 149	Lbs. 159	Lbs. 248	Lbs. 270	Lbs. 456	Lbs. 738	Lbs. 1270
Rec. Flow	GPM 60	GPM 90	GPM 140	GPM 240	GPM 370	GPM 540	GPM 940	GPM 1470	GPM 2090

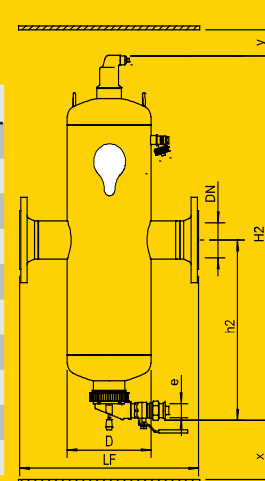

Spirovent Quad® | Hydraulic Separator, Air Eliminator, Dirt Separator with Magnet

Part Number	VDX200FAM	VDX250FAM	VDX300FAM	VDX400FAM	VDX500FAM	VDX600FAM	VDX800FAM	VDX1000FAM	VDX1200FAM
Pipe Size	Inch 2	Inch 2.5	Inch 3	Inch 4	Inch 5	Inch 6	Inch 8	Inch 10	Inch 12
D	Inch 6.3	Inch 6.3	Inch 8.6	Inch 8.6	Inch 12.8	Inch 12.8	Inch 16.0	Inch 20.0	Inch 24.0
H2	Inch 32.0	Inch 36.0	Inch 39.0	Inch 50.0	Inch 61.0	Inch 70.0	Inch 91.0	Inch 113.0	Inch 133.0
h2	Inch 9.4	Inch 9.9	Inch 10.6	Inch 13.8	Inch 17.4	Inch 19.9	Inch 26.6	Inch 32.9	Inch 39.2
h3	Inch 9.5	Inch 12.0	Inch 14.0	Inch 18.0	Inch 22.0	Inch 26.0	Inch 34.0	Inch 42.0	Inch 50.0
LF	Inch 15.0	Inch 15.0	Inch 20.0	Inch 20.0	Inch 26.0	Inch 26.0	Inch 32.0	Inch 36.0	Inch 42.0
e	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1	Inch 1
x	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3
y	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3	Inch 3
Weight	Lbs. 90	Lbs. 106	Lbs. 156	Lbs. 207	Lbs. 283	Lbs. 333	Lbs. 642	Lbs. 998	Lbs. 1767
Rec. Flow	GPM 60	GPM 90	GPM 140	GPM 240	GPM 370	GPM 540	GPM 940	GPM 1470	GPM 2090

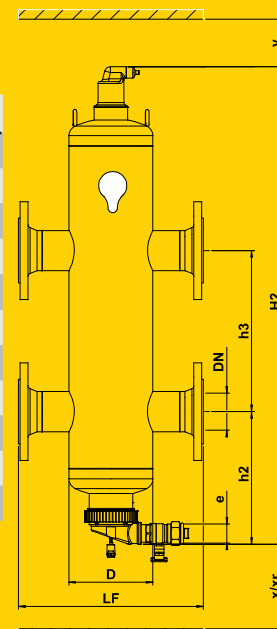

©2022 Spirotherm, Inc. VDTM/VDXM-1