


Submittal Data

VHN 36

Spirovent® Drain 36" High Velocity Air Eliminator and Dirt Separator

Job Name:			
Engineer:			
Contractor:			
Representative:			

Tag	Model	Flow	Size	Location

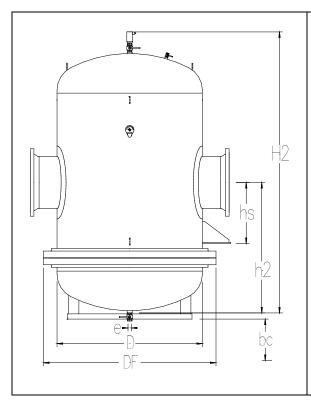


Specifications:	
Shell	Steel
Vent Head	Brass
Float	Non-Ferrous
Seal	Viton
O Ring	Viton
Skim Valve	Brass
Coalescing Medium	Copper
Ball Valve	Brass
Max. Working Pressure	150 psig
Max. Operating Temperature	270°F

Notes:

Removable lower portion to facilitate cleaning if required.

(bc: Minimum bundle removal clearance)



Pipe Size	36"		
D (inches) 96	\ _{\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\}	+
H2 (inches) 204	\	
h2 (inches) 96		16"
LF (inches) 132	10" 4"	
DF (inches) 114		
hs (inches) 36] 4 4 3" 1	+
e (inches) 2	19" —	4 4"
bc (inches) 123		
Dry Weight (lbs	20,000	Bracket Detail	Bracket Detail
Volume (gallons) 5,420		
Max Flow (gpm) 29,600		
Model			
VHNF	3600		

(Dimensions for reference only)

Flanged ASME Section VIII, Division 1 Stamped and Registered