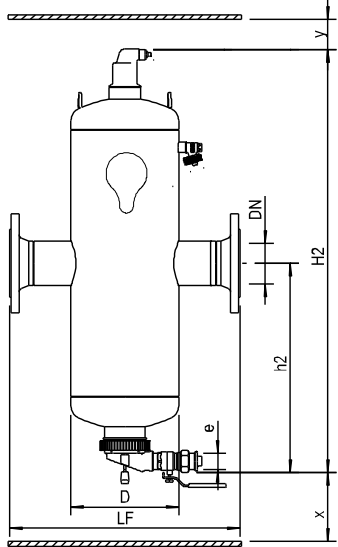


Spirovent® Combi
Air Eliminator and Dirt Separator with Magnet

Job Name:
Engineer:
Contractor:
Representative:

Tag	Model	Flow	Size	Location

	<p>Specifications:</p> <table border="1"> <tr><td>Shell</td><td>Steel</td></tr> <tr><td>Vent Head</td><td>Brass</td></tr> <tr><td>Float</td><td>Non-Ferrous</td></tr> <tr><td>Seal</td><td>Viton</td></tr> <tr><td>O Ring</td><td>Viton</td></tr> <tr><td>Skim Valve</td><td>Brass</td></tr> <tr><td>Coalescing Medium</td><td>Copper</td></tr> <tr><td>Magnets</td><td>Neodymium</td></tr> <tr><td>Ball Valve</td><td>Brass</td></tr> <tr><td>Max. Working Pressure</td><td>150 psig</td></tr> <tr><td>Max. Operating Temperature</td><td>270°F</td></tr> </table> <p>Notes:</p>	Shell	Steel	Vent Head	Brass	Float	Non-Ferrous	Seal	Viton	O Ring	Viton	Skim Valve	Brass	Coalescing Medium	Copper	Magnets	Neodymium	Ball Valve	Brass	Max. Working Pressure	150 psig	Max. Operating Temperature	270°F
Shell	Steel																						
Vent Head	Brass																						
Float	Non-Ferrous																						
Seal	Viton																						
O Ring	Viton																						
Skim Valve	Brass																						
Coalescing Medium	Copper																						
Magnets	Neodymium																						
Ball Valve	Brass																						
Max. Working Pressure	150 psig																						
Max. Operating Temperature	270°F																						

DN – Pipe Size	2"	2 ½"	3"	4"	5"	6"
D (inches)	6.3	6.3	8.6	8.6	12.8	12.8
H2 (inches)	29.3	29.3	35.4	35.4	45.7	45.7
h2 (inches)	12.4	12.4	15.6	15.6	20.9	20.9
LF (inches)	15.2	15.7	20.2	20.6	27.7	27.7
e (inches)	1	1	1	1	1	1
x (inches)	3	3	3	3	3	3
y (inches)	3	3	3	3	3	3
Weight Flg (lbs)	76	85	149	159	248	270
Rec. Flow (gpm)	60	90	140	240	370	540
Model VDT__FAM	200	250	300	400	500	600

(Dimensions for reference only)

Flanged ASME Section VIII, Division 1 Stamped and Registered

© 2021 Spirotherm, Inc., 462 Camden Dr, Bloomingdale, IL 60108